

- High quality fully channelled blackout blinds with metal masking frames in available colour of your choice.
- Continuous brush seals on side channels.
- Solid bottom rails preventing fabric deflection or open base systems for doorways/sill access.
- Total blackout fabric flame retardant to BS5867 Pt2b, Matching vertical blinds etc. available.
- Standard rollers available with a range of blackout/dim-out fabrics ideally suited to vision panels etc.
- Full electrical systems - available in 240/110v or low voltage, hard wired/remote, integrated to full audio visual configurations.
- Special Application Blinds available for Sky Lights, Bay Windows, Roof Domes and Laboratories etc.
- Range of screens, projectors, smart boards and AV equipment available.













**CONTACT US TODAY
FOR A FREE SITE SURVEY & QUOTATION**

0800 3 10 10 20



CONTRACTORS HEALTH & SAFETY ASSESSMENT SCHEME
Accredited Contractor
www.chas.gov.uk

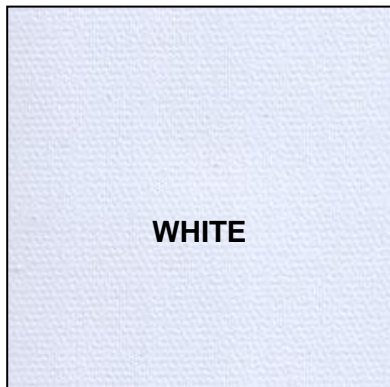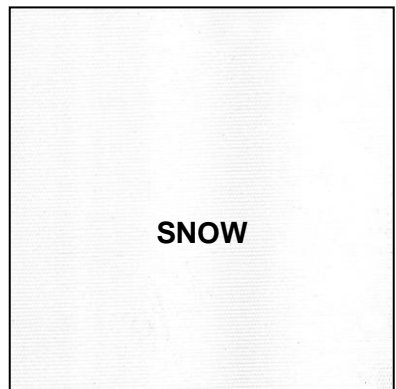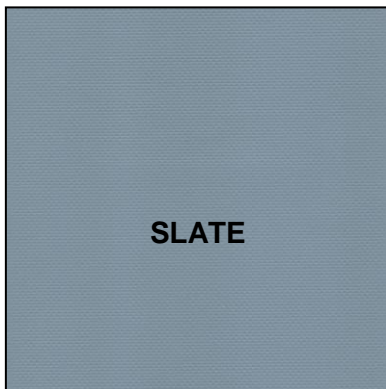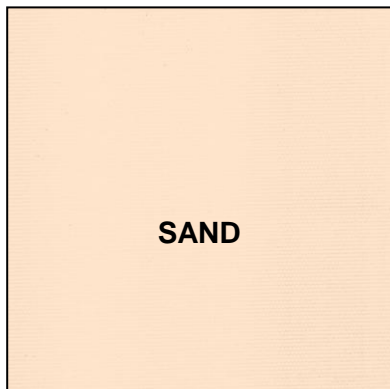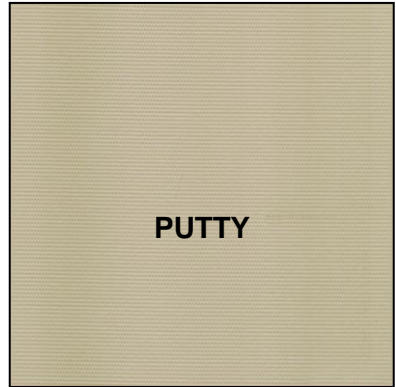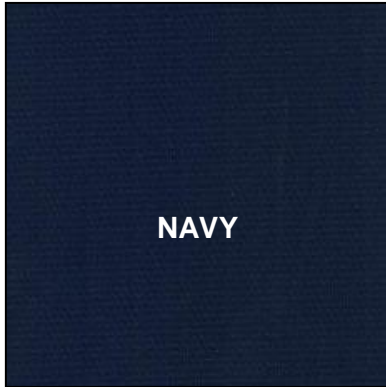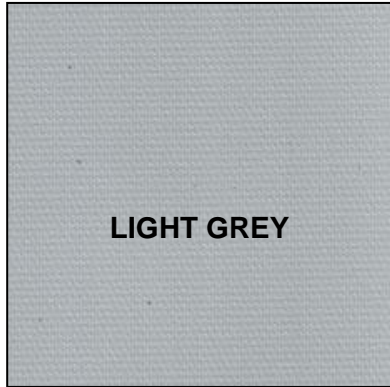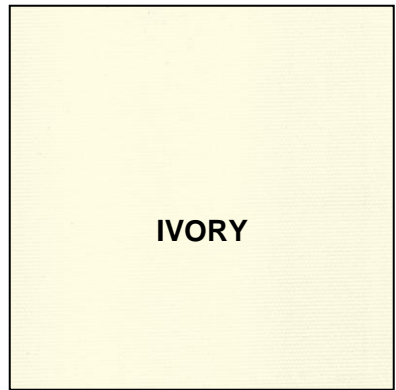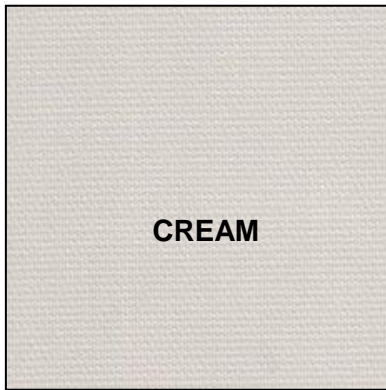

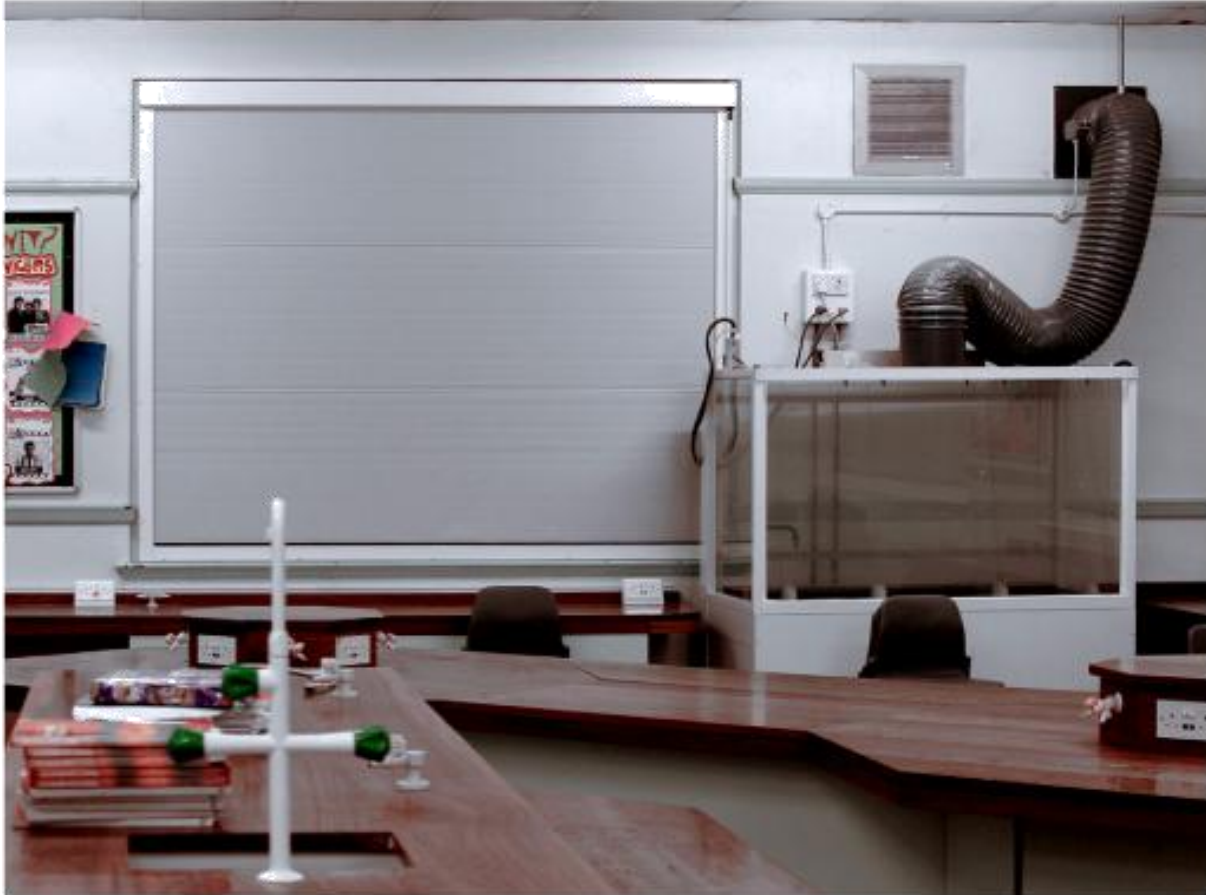

Interior Roller Blind

The Window Charm Blackout Blind is a robust, light excluding, cassetted roller blind system, suitable for a wide variety of room darkening applications.

Construction

The blind box, side and bottom channels are made from pre-painted steel, with a tough, 200 micron, plastisol coating. Standard colours are black or white, with additional colours available on request.

Roller

A high strength roller shall be incorporated to suit the application of the blind.

Fabric

The fabric used on the blind is the light excluding, fire retardant Exlite range, available in various colours.

Control

The specifications on this data sheet apply to standard, cord / cleat operated blinds. Other options available are gear / crank operation, and electric operation using Somfy RTS motors.


Fitting Positions

The Window Charm Blackout Blind can be fitted inside or outside of the window recess, over fan lights and under roof lights.

Size

Blinds are available as described up to a maximum of 3048mm wide or 3048mm drop, but the total area cannot exceed 5.9 square metres.

'Windcheat' bars are incorporated as standard on larger blinds to retain the cover in the channels when a window is opened.

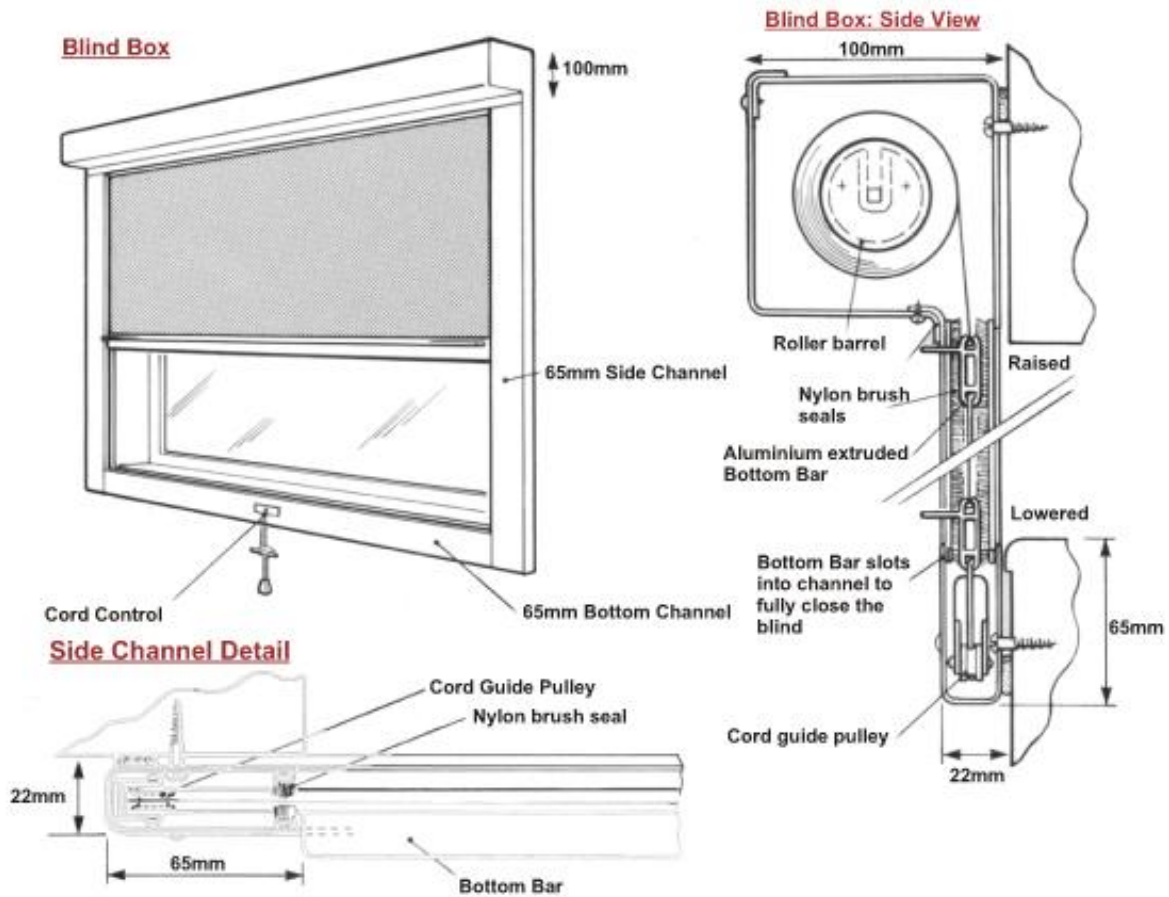

Fixing: Window Charm Blackout Blinds are supplied either fully or part assembled dependant on size, access etc.

