

- Fully cassetted awning provides protection to both fabric and mechanism for a longer life.
- Manufactured using high quality aluminium and cast parts for optimum safety under extreme loads.
- Supported by 2 articulated arms with 4mm tear resistant cables to guarantee at least 25,000 movements.
- Awnings available upto a great 6,000mm wide and 4,000mm projection - multi-linked for greater widths.
- A large range of optional extras available including; Electrical operation, RC patio heaters, RC LED lights, PIR Sensor, Sun & Wind Sensor, Rain Sensor, Powder coated to RAL.
- Complete with a standard 5 year parts guarantee.
- Free-standing Pagoda Style, Patio and Terrace Awnings for corporate events, Semi Permanent exterior use covered work/play areas for schools.



**CONTACT US TODAY
FOR A FREE SITE SURVEY & QUOTATION**

0800 3 10 10 20



CONTRACTORS HEALTH & SAFETY ASSESSMENT SCHEME
Accredited Contractor
www.chas.gov.uk



A selection of the striped fabrics available - large range of plain colours also available.



Colours only as good as the quality of print
Please ask for actual fabric samples

The 'Contract' is a fully cassetted folding arm awning that is elegant and durable




Slender articulated arm with 2 sheathed cables - guarantess more then 25,000 movements




Cast aluminium components along with advanced mechanism guarentees a simple inclination adjustment




The elegant cover closes exactly against the cassette, and is distinguished by its high tension resistance

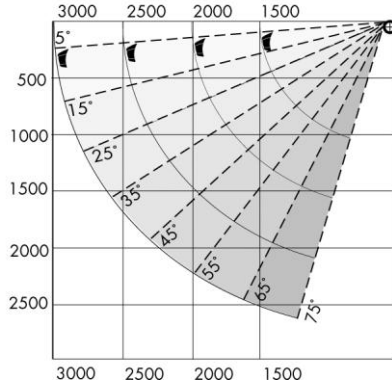


Pitch Settings

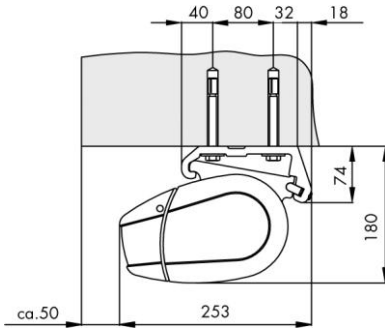

Top Fix

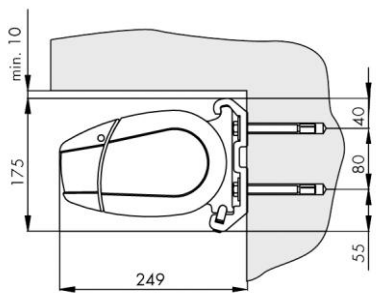

Face Fix

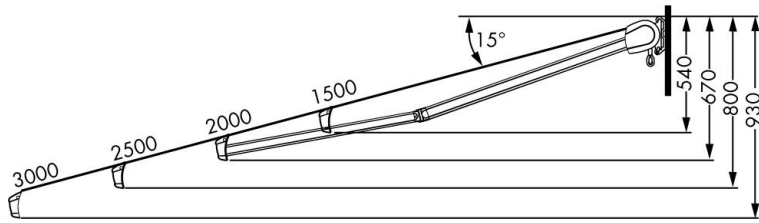

Projection Settings

TECHNICAL SPECIFICATION – 'CONTRACT' (mm)				
Projection	1500	2000	2500	3000
Minimum Width	1880	2380	2880	3390
MAXIMUM WIDTH:				5000
MAXIMUM PROJECTION				3000

The 'Elite' is a top of the range folding arm fully cassetted awning.



Elegantly form headbox made from cast aluminium for ultimate protection of parts and fabric




New Multiplex arm ensures long lasting trouble free life - Upto 75,000 movements




The awning is fixed to the wall or ceiling with easily adjustable brackets that allows inclinations of 0-40 degrees




The protection profile protects the fabric on the tube even when the awning is projected. The supporting mechanism ensures the fabric is correctly tensioned.

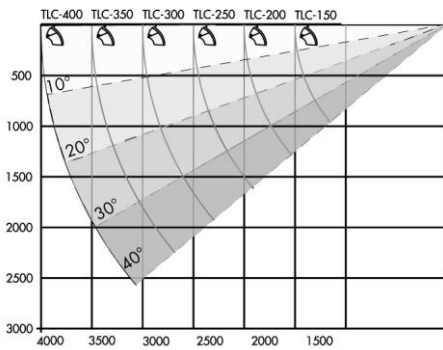


Pitch Settings

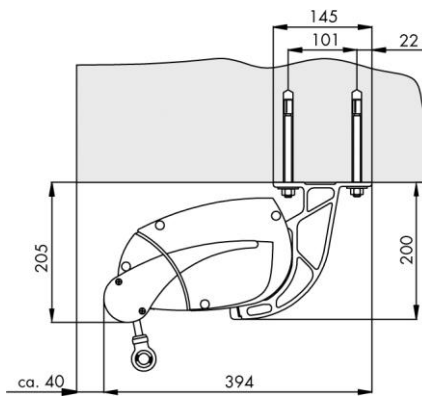

Top Fix

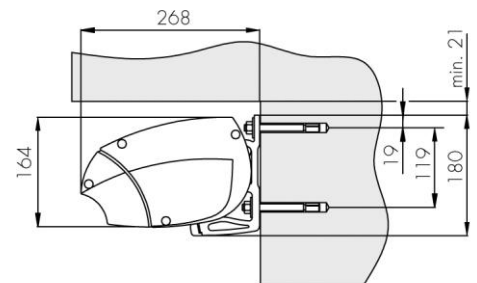

Face Fix

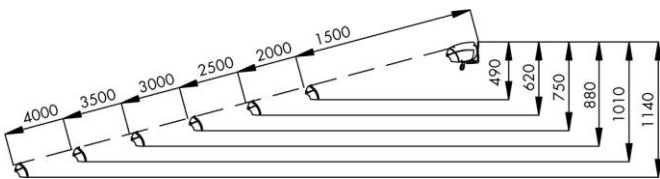

Projection Settings

TECHNICAL SPECIFICATION – 'ELITE' (mm)						
Projection	1500	2000	2500	3000	3500	4000
Minimum Width	2000	2500	3000	3500	4000	4500
MAXIMUM WIDTH:		7000				
MAXIMUM PROJECTION		4000				